JUMPKING Trampolines

Building the Frame

The circular frame of the JumpPOD comprises 8 curved top tubes. There are 2 different types of Top Tube: Key No. 2 (detailed below) and Key No. 1(detailed overleaf).

The Top Tubes must be assembled in the correct order, as detailed below:

10ft JumpPOD. Please start with the following parts:

1x Top Tube (Key No. 2) and 1 x Enclosure 'A' Socket (Key No. 4)

Large 'A' Socket

With the top tube in this position you should see **4 spring holes**, as shown below.

Slim square end

Please use the following information to identify the correct parts. The curved Top Tube (Key No. 2) above has two square ends. One square end is slimmer than the other. Please ensure that you have 5 spring holes visible as shown, with the **slimmer** square end on the **right**. (5 spring holes will be face down on the ground). This is essential for the assembly.

The wider square end should be on the left. Push the Large 'A' Socket (4) on to the wide square end.

Important!

Make sure the small screw hole in the Large 'A' Bracket is positioned on the outside of the curve, as shown.

Repeat this with the 3 remaining Key No. 2 and 4.

Notes: Please read this document in conjunction with the JumpPOD User's Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.

10ft JumpPOD. Please then take the following parts:

1 x Top Tube (Key No. 1) with ‘B’ Socket (Key No. 3)

Small ‘B’ Socket

With the top tube in this position you should see 4 spring holes, as shown below.

Short square end

The curved top tube above will have the Small ‘B’ Socket already attached, as shown above.

Detached ‘B’ Sockets?

If the ‘B’ Socket has come off, please assemble Key No. 2 and Key No. 4 **first**, as shown on the previous page.

Then position Top Tube (Key No. 1) as shown above, with **4 spring holes visible**. You will see that the top tube has two square ends. (5 spring holes will be face down on the ground).

Push the Small ‘B’ Socket onto the square end on the left, as shown above.

Please ensure that the left hand square end is pushed **all the way through** the Small ‘B’ Socket, so it is flush with the edge of the Small ‘B’ Socket.

Repeat this with the 3 remaining Key No. 1 and 3.

Notes: Please read this document in conjunction with the JumpPOD User’s Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.

Note: For the rest of the guide, Key No.'s will be detailed in brackets after the part description, for example 'Top Tube **(1)**'.

The easiest way to put the trampoline together is in 4 individual quadrants.

For the first of these 4 quadrants, please lay out the Top Tubes (2) and (1) as shown below.

Make sure the 'A' and 'B' Sockets are securely attached, as shown in the previous steps.

In this position, both Top Tubes (2) and (1) will have 4 spring holes visible.

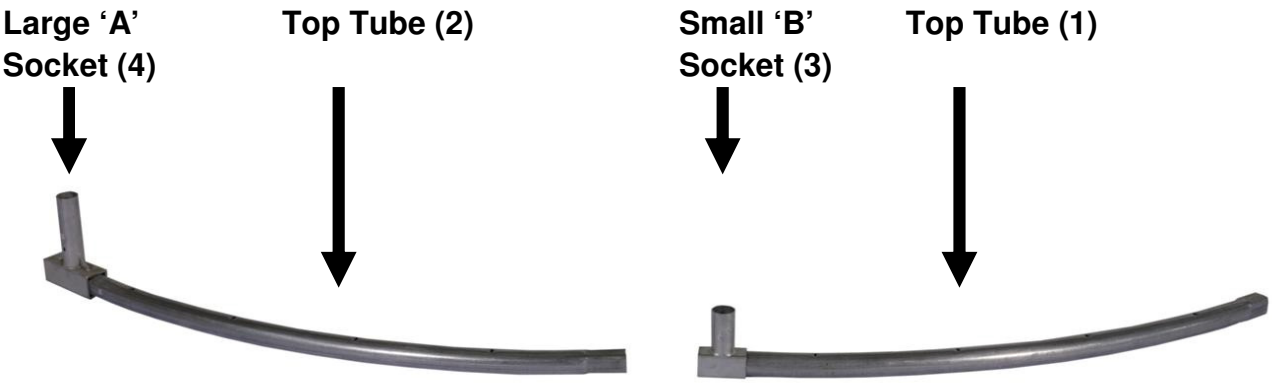

Insert the small end of one Top Tube (2) into the T-connector on the other Top Tube (1) to join the tubes, as shown below.

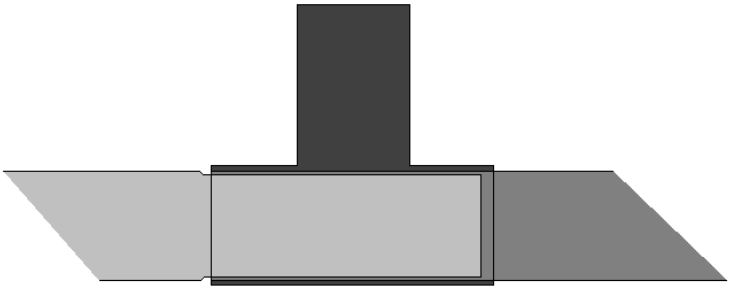

This will create a male and female connection **inside** the Small 'B' Socket (3), as shown on the right.

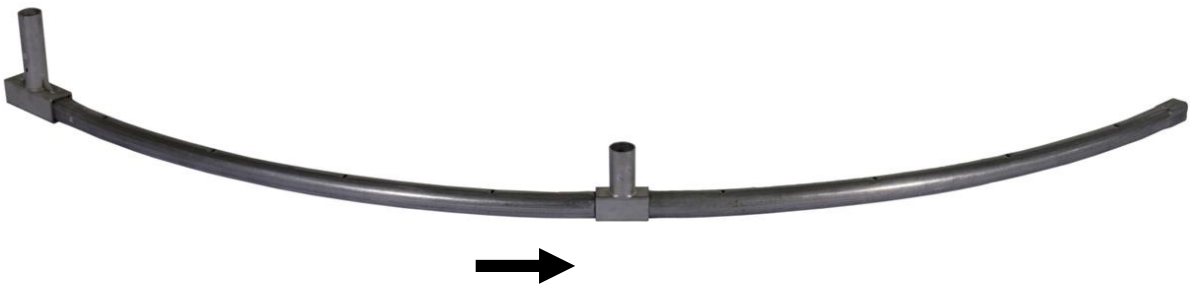

Notes: Please read this document in conjunction with the JumpPOD User's Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.

Now take 1 x Leg Extension ‘A’ (6) and insert it into the Large ‘A’ Socket (4) of the left hand Top Tube (2).

Take the Centre Leg (7) and insert this into the Leg Extension ‘A’ (6), as shown.

Notes: Please read this document in conjunction with the JumpPOD User’s Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.

Then take a Leg Extension ‘B’ (5), and attach it to the **Centre Leg** (7) as shown.

Now grasp the free end of Leg Extension ‘B’ (5) and pull until it lines up with the open Small ‘B’ Socket (3).

By placing your hands further down the Leg Extension ‘B’ (5), you can increase your leverage.

You can also place your feet on the top rails either side of the Small ‘B’ Socket (3) to steady the assembly, as shown in the image.

Pull the Leg Extension ‘B’ (5) into the open Small ‘B’ Socket (3). Once you have inserted the Leg Extension ‘B’ (5), push down firmly on the Centre Leg (7) to ensure a tight fit.

Notes: Please read this document in conjunction with the JumpPOD User’s Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.

JUMPKING Trampolines

You have now completed 1 x quadrant, as shown.

Repeat these steps to assemble 3 more quadrants, giving 4 in total.

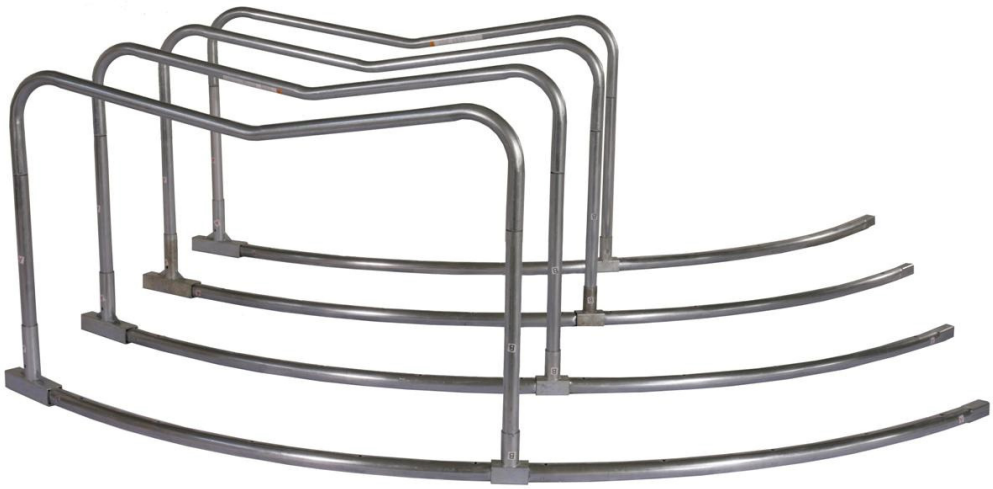

Notes: Please read this document in conjunction with the JumpPOD User's Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.

This next step will require at least 2 people. Make sure you are wearing gloves.

Turn the 4 x quadrants over and join 2 Sections to together as shown.

Push the end of Top Tube (2) into the open end of Large ‘A’ Socket (4)

Notes: Please read this document in conjunction with the JumpPOD User’s Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.

Then add a third quadrant, as shown.

Now add the fourth quadrant to form the circular shape.

This will require extra effort. The easiest method is for 2 people to face each other.

Then hold the Top Tubes either side of the T-Connectors and both push towards the centre of the trampoline.

As the 2 people push towards each other, 1 person can join the final part of the circle.

Make sure you wear gloves.

Notes: Please read this document in conjunction with the JumpPOD User's Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.

JUMPKING®
Trampolines

You will now have a complete Frame, as shown below.

Notes: Please read this document in conjunction with the JumpPOD User's Manual. Assembly requires a minimum of 2 people. Use gloves to protect your hands during assembly.